

Series VTF53A Flush Diaphragm Pressure Transmitter

SPECIFICATIONS

- High Accuracy
- Compact Design
- Variety of Pressure Ports and Electrical Configurations
- High Corresponding Frequency (>1 kHz)
- Multiple Output Options: 0–10 VDC, 1–5 VDC, and 4–20 mA

FEATURES

- Compact, Sturdy flush diaphragm, impact resistance
- Pressure range up to 10000psi
- Variety of Pressure Ports
- Non linearity upto $\pm 0.5\%$
- Up to $\pm 1.0\%$ Total Error Band
- $-10^{\circ}\text{...}+70^{\circ}\text{C}$ Compensated Temperature
- $-40^{\circ}\text{...}-120^{\circ}\text{C}$ Operating Temperature

APPLICATIONS

- Environmental-friendly chemical coatings and polyurethane equipment
- Food grade or medical equipment for pressure control
- Paint detection system
- Slurry of mud or coal, Mud slurry Pump, Paper pulp, Crude, Asphalt, etc.
- Oilfield drilling, Well logging, Offshore oil production stands, Oil well measuring instruments, etc
- Other industrial sites requiring resistance of blocking, high-strength vibration and impact



Series VTF53A

Flush Diaphragm Pressure Transmitter

Standard pressure ranges

Measuring Method	Range (psi)	Range (Bar)	Gage	Sealed	Absolute	Compound	
Micro-fused pressure sensor	0 to 250	0 to 16	•			•	
	0 to 360	0 to 20	•			•	
	0 to 500	0 to 35	•			•	
	0 to 750	0 to 50	•			•	
	0 to 1000	0 to 70	•			•	
	0 to 1500	0 to 100	•			•	
	0 to 2250	0 to 150	•			•	
	0 to 3000	0 to 200	•			•	
	0 to 3700	0 to 250	•			•	
	0 to 5000	0 to 350	•			•	
	0 to 6000	0 to 400	•			•	
	0 to 7500	0 to 500	•			•	
	0 to 10000	0 to 700	•			•	
	0 to 15000	0 to 1000	•			•	
Consult manufacture to custom order,•S							

Performance

Pressure


PARAMETERS	MIN	TYP	MAX	UNITS	NOTES
Accuracy (Combined Non-linearity, hysteresis, and repeatability)	-0.3	±0.25	0.3	%F.S. BFSL	@ 25°C > 5.0Mpa
	-0.1	±0.5	0.1	%F.S. BFSL	@ 25°C < 5.0Mpa
Zero Error	-0.5	±0.25	0.5	%F.S. BFSL	@25°C
Full Scale Error	-1	±0.5	1	%F.S. BFSL	@25°C
Isolation, Body to any Lead	1000			MΩ	@500VDC
Dielectric Strength			2	mA	@500VAC, 1min
Pressure Cycles	1X10 ⁷			0~FS Cycles	
Proof Pressure	1.5 X		15k psi		Rated
Burst Pressure	2X		15k psi		Rated
Long Term Stability (1 year)	-0.25	±0.25	0.25	%F.S.	
Total Error Band	-1.0	±0.5	1	%F.S.	Over compensated temperature range
	-2.0	±1	2	%F.S.	
Compensation Temperature	-10		70	°C	
Operating Temperature	-20		+120	°C	Except cable 105°C MAX
Storage Temperature	-20		+120	°C	Except cable 105°C MAX

Load Resistance (RL)	RL > 100k	Ω	Voltage Output
Load Resistance (RL)	< (Supply Voltage -9V) / 0.02A	Ω	Current Output
Current Consumption	10	mA	Voltage Output
Rise Time (10% to 90%)	<2ms (Voltage Output); <3ms (Current Output); Without Snubber		
Pressure Port Material	17-4PH		
Shock	50g, 11msec Half Sine Shock per MIL-STD-202G, Method 213B, Condition A		
Vibration	±20g, MIL-STD-810C, Procedure 514.2-2, Curve L		

The graph opposite shows the maximum deviation across the entire medium temperature range (-10...70 °C, optional: -40...125 °C).

Within the compensated pressure and temperature range, the total error has a maximum value of 1 %FS (0...70 °C)

Experience shows that outside the compensated temperature range, total error increases linearly by 0,04 %FS/K.

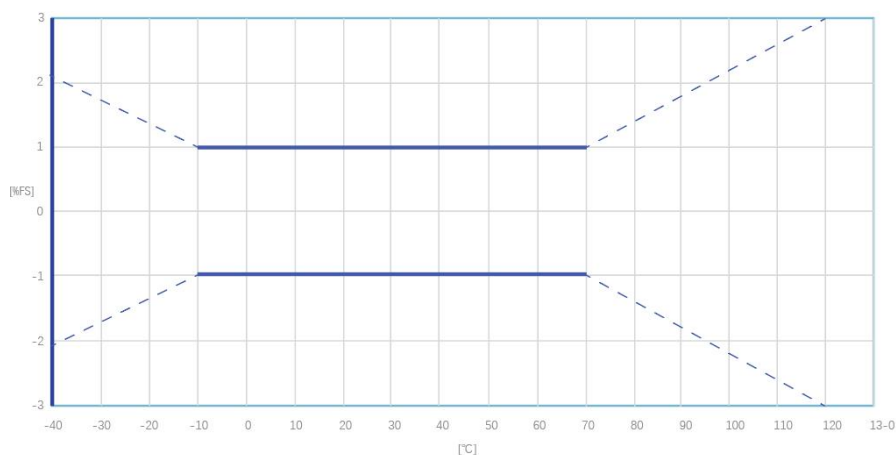

CODE	CONNECTION TYPE	DIM C (MAX)
1	Cable	1.97 [50.0]
2	Packard A	2.10 [53.5]
3	Packard B	2.10 [53.5]
4	M12	1.71 [43.5]
5	FORM A	1.93 [49.0]
6	FORM C	1.97 [50.0]
7	AMP	2.52 [64.0]

CODE	OUTPUT SIGNAL	SUPPLYVOLTAGE
1	0.5-4.5V	5±0.25V
	Ratiometric	Protected to 16V
2	1-5V	8-36V
3	4-20mA	9-36V
4	0-5V	8-36V
5	0-10V	13-36V
6	1-6V	8-36V
7	0.5-4.5V	7.5-36V

CODE	PRESSURE PORT TYPE
	PORT
1	G1/4 JIS B2351
2	M5
3	M6
4	M8
5	M14x1.5 mm ISO 6149-2
6	1/8-27 NPT
7	M12×1.5 mm ISO 6149-2
8	M10x1.0 mm ISO 6149-2
9	G1/4 DIN 3852 FORME GASKETDIN3869-14 NBR

Series VTF53A

Flush Diaphragm Pressure Transmitter

The following wiring definition is commonly used in Mainland China and will need to be determined individually with the European, the UK and the US customers.

CURRENT OUTPUT WIRING					
CONNECTION	+SUPPLY	-SUPPLY	NC. PINS		P REF VENT
Packard, A	A	B	C		Hole Through Connector
Packard, B	B	A	C		
FORM A	1	2	3,4		
M12	1	2	3,4		
CABLE	RED	BLK			Pipe In Cable
VOLTAGE OUTPUT WIRING					
CONNECTION	+SUPPLY	+OUTPOT	COMMON	NC. PINS	P REF VENT
Packard, A	A	C	B		Hole Through Connector
Packard, B	B	C	A		
FORM A	1	3	2	4	
M12	1	3	2	4	
CABLE	RED	WHT	BLK		Pipe In Cable

Compensated Temperature:

This is the temperature range within which the product will produce an output proportional to pressure, while remaining within the specified performance limits.

Operating Temperature:

This is the temperature range within which the product will produce an output proportional to pressure, but it may not remain within the specified performance limits.

Storage Temperature:

This is the temperature range within which the product can be safely stored without pressure applied or power input, while still maintaining its rated performance. Exposure to temperatures beyond this range may cause permanent damage to the product.

All configurations are designed with protection against reverse supply voltage and output short circuits.

CE Compliance (just for reference)

EN 55022 Emissions Class A & B

IEC 61000-4-2 Electrostatic Discharge Immunity (8kV contact/15kV air)

IEC 61000-4-3 Radiated, Radio-Frequency Electromagnetic Field Immunity (10V/m, 80M-1GHz)

IEC 61000-4-4 Electrical Fast Transient Immunity (1kV)

IEC 61000-4-5 Surge Immunity (V+ to V-: $\pm 2\text{KV}/42\Omega$; L to Case: $\pm 1\text{KV}/12\Omega$; V- to V0: $\pm 1\text{KV}/42\Omega$)

IEC 61000-4-6 Immunity to Conducted Disturbances Induced by Radio Frequency

Fields (150K~80MHz, 10V level for voltage output models, 3V level for current output model)

IEC 61000-4-9 Pulse Magnetic Field Immunity (100A/m peak)

For all CE compliance tests, max allowed output deviation $\pm 1.5\%$ F.S. (Just Factory Testing)

Weather-Proof Rating

Connection	P Code
Packard A / B	IP66
Cable	IP67
M12	IP67
Form A	IP65
Form C	IP66
AMP	IP66

Mechanical data


Materials in contact with media

Pressure connection	Stainless steel 17-4 PH
Pressure transducer diaphragm	Stainless steel SUS 316L
Pressure transducer seal (internal)	None
Pressure connection seal (external)	None, metallicly sealed


Electrical connections

Round plug	2-wire	3-wire	Valve plug	2-wire	3-wire
M12 × 1	4...20 mA	0...10 V	Form A	4...20 mA	0...10 V
	1 +Vs	1 +Vs		1 n.c.	1 GND
	2 n.c.	2 n.c.		2 OUT/GND	2 +OUT
	3 OUT/GND	3 +OUT		3 +Vs	3 +Vs
	4 n.c.	4 GND		↓ Case	↓ Case

Dimension (mm)

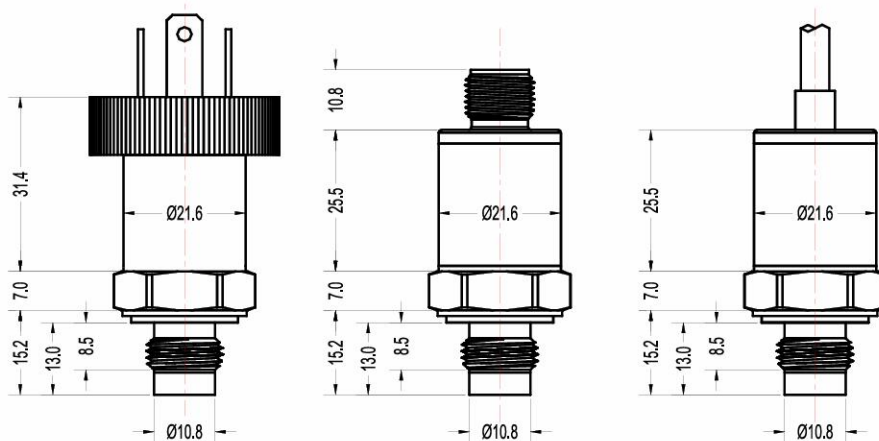

Mounting Thread

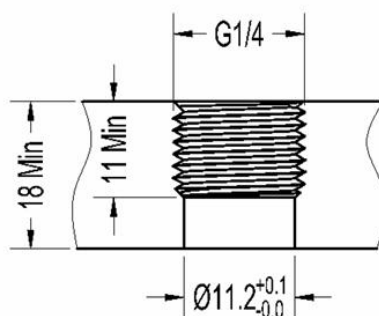

Series VTF53A – Ordering Information

Example	VTF53A0341015500PG	VTF53A	3	4	1	0	1	5	500P	G
Model Code VTF53A Pressure Transducer										
Output	1	0.5-4.5V RATIOMETRIC								
	2	1-5V								
	3	4-20mA								
	4	0-5V								
	5	0-10V								
	6	1-6V								
	7	0.5-4.5V								
	x	Customization								
Connection	1	Cable								
	2	Packard A								
	3	Packard B								
	4	M12								
	5	FORM A								
	6	FORM C								
	7	AMP								
	8	Customization								
Port Material	1	304Screw+ 17-4 Diaphragm								
	2	17-4 Integral Screw								
	X	Customization								
Snubber	0	No Snubber								
	1	With Snubber								
Label	0	No Label (OEM)								
	1	AdhesiveLabel								
	2	Laser Marking								
Pressure Port	1	G1/4 JIS B2351								
	2	M20 x 1.5								
	3	1/4-18 NPT								
	4	7/16-20UNF FEMALE SAE								
	5	M14 x 1.5								
	6	1/8-27 NPT								
	7	M12 x 1.5								
	8	M10 x 1.0								
	9	G1/4 DIN 3852								
	A	G3/8 JIS B2351								
	X	Customer Specia								
Pressure Range	B	Bar								
	M	Mpa								
	P	PSI								
	K	Kpa								
Pressure Type	G	Gauge								
	S	Sealed (>500PSI)								
	C	Compound								