

Series VTP540

Compact Sputtered Thin Film Pressure Transducer

Sputtering Thin Film Pressure Sensor

Features

- Heavy Industrial
- Integral Pressure Cavity, No leakage
- Reverse Polarity Protection on Input
- Short Circuit Protection on Output
- Up to $\pm 0.25\%$ Accuracy
- Up to $\pm 1\%$ Total Error Band
- Compact Outline
- -40°C to $+125^{\circ}\text{C}$ Operating Temperature
- -20°C to 80°C Compensated Temperature

Specification

- High Accuracy
- Compact
- Variety of Pressure Ports and Electrical Configurations
- Optional damper
- CE Compliant and Weatherproof
- Gage, Compound
- High Accuracy

Applications

- Industrial Process Control and Monitoring
- Advanced HVAC Systems
- Refrigeration Systems
- Automotive Test Stands
- Off-Road Vehicles
- Pumps and Compressors
- Hydraulic/Pneumatic Systems
- Agriculture Equipment
- Energy Generation and Management

Accuracy


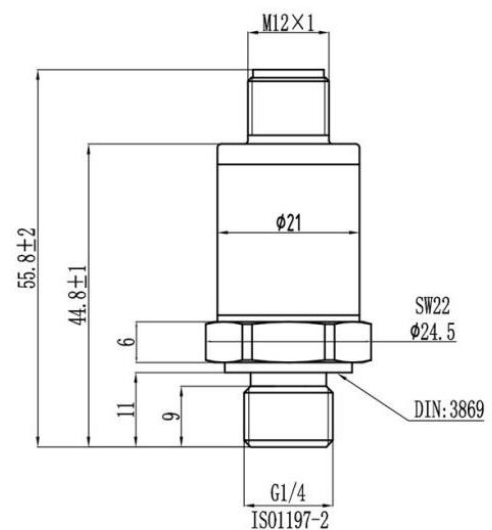
$\pm 0.25\% \text{FS}$, $\pm 0.5\% \text{FS}$

Total error band

$\pm 1.0\% \text{FS}$ @ $-20 \dots 80^{\circ}\text{C}$

Pressure ranges

0...7 to 0...2500 bar



Series VTP540 Pressure Transducer

Standard pressure ranges

Standard Ranges

Measuring Method	Range (psi)	Range (Bar)	Gage	Sealed	Absolute	Compound	
Metal Thin-film pressure sensor or Micro-fused pressure sensor (Relative pressure)	0 to 100	0 to 7	•				
	0 to 150	0 to 10	•				
	0 to 250	0 to 16	•			•	
	0 to 500	0 to 35	•			•	
	0 to 1000	0 to 70	•			•	
	0 to 1500	0 to 100	•			•	
	0 to 2250	0 to 150	•			•	
	0 to 3000	0 to 200	•			•	
	0 to 5000	0 to 350	•			•	
	0 to 7500	0 to 500	•			•	
	0 to 10000	0 to 700	•			•	
	0 to 15000	0 to 1000	•			•	•S
	0 to 22000	0 to 1500	•			•	•S
	0 to 35000	0 to 2500	•			•	•S
	Consult manufacture to custom order,•S						

Performance

Pressure


PARAMETERS	MIN	TYP	MAX	UNITS	NOTES
Accuracy (Combined Non-linearity, hysteresis, and repeatability)	-0.5 -0.5	±0.5 ±0.25	0.5 0.5	%F.S. BFSL	@ 25°C
Zero Error	-0.2	±0.5	0.2	%F.S. BFSL	@25°C
Full Scale Error	-0.3	±0.5	0.3	%F.S. BFSL	@25°C
Isolation, Body to any Lead	100			MΩ	@250VDC
Dielectric Strength			2	mA	@500VAC, 1min
Pressure Cycles	1X10 ⁷			0~FS Cycles	
Proof Pressure	3X (5~25bar)	2X (40~600bar)	1.5X (700~2000bar)		≤3000bar 2500bar
Burst Pressure	8X	10X	≤4000bar		≤4000bar
Long Term Stability (1 year)	-0.3	0.5	0.5	%F.S.	
Total Error Band	-2	±1	+2	%F.S.	Over compensated temperature range
Compensated Temperature	-20		80	°C	
Operating Temperature	-40		+125	°C	Except cable 105°C MAX
Storage Temperature	-40		+125	°C	Except cable 105°C MAX
Load Resistance (RL)	RL ≥ 2k			Ω	Voltage Output
Load Resistance (RL)	RL ≤ 50 × (Vcc - 8)			Ω	Current Output
Current Consumption			2	mA	Voltage Output
Rise Time (10% to 90%)	<2ms (Voltage Output); <3ms (Current Output); Without Snubber				
Pressure Port Material	17-4PH + SST304				
Shock	100g, 6ms (IEC60068-2-27)				
Vibration	20g, 20Hz ~ 2000H (IEC60068-2-6)				

Total error band

The graph opposite shows the maximum deviation across the entire medium temperature range (-20 ... 125 °C, optional: -40 ... 125 °C).

Within the compensated pressure and temperature range, the total error has a maximum value of 0,5 %FS (-20...80 °C)

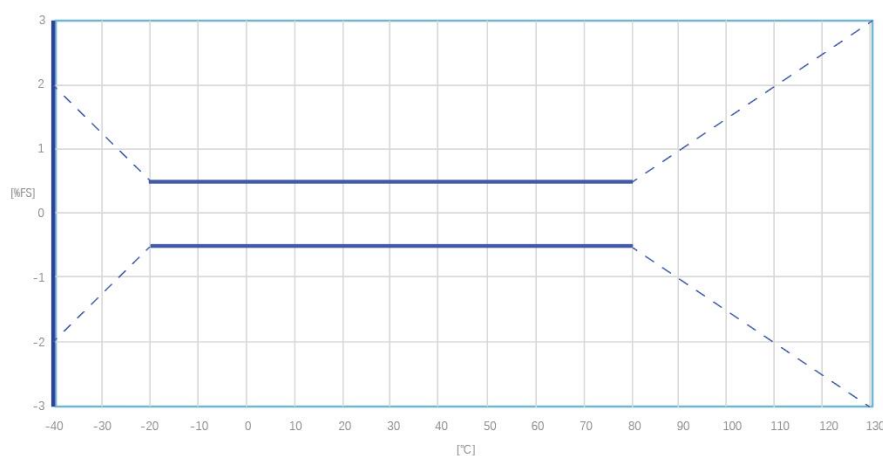Experience shows that outside the compensated temperature range, total error increases linearly by 0,04 %FS/K.



Range	Overload Pressure	Burst Pressure	Range	Overload Pressure	Burst Pressure
0...0.5 MPa	1.5 X	20%	0..60 MPa	3 X	5 X
0...1.0 MPa	1.5 X	20%	0...70 MPa	1.5X	5 X
0...1.6 MPa	1.5 X	15%	0...100 MPa	1.5 X	≤400MPa
0...2.5 MPa	1.5 X	15%	0...120 MPa	1.5 X	≤400MPa
0...4 MPa	2 X	10 X	0...140 MPa	1.5 X	≤400MPa
0...6 MPa	2 X	10 X	0...160 MPa	1.5 X	≤400MPa
0...10 MPa	2 X	10 X	0...180 MPa	1.5X	≤400MPa
0...16 MPa	3 X	5 X	0...200 MPa	1.5 X	≤400MPa
0...25 MPa	3 X	5 X	0...250 MPa	≤300MPa	≤400MPa
0...40MPa	3X	5 X			

Series VTP540 – Specifications

CODE	OUTPUT SIGNAL	SUPPLYVOLTAGE
1	0.5-4.5V	5±0.25V
	Ratiometric	Protected to 16V
2	1-5V	8-36V
3	4-20mA	9-36V
4	0-5V	8-36V
5	0-10V	13-36V
6	1-6V	8-36V
7	0.5-4.5V	7.5-36V

CODE	CONNECTION TYPE	DIM C (MAX)
1	Cable	1.97 [50.0]
2	Packard A	2.10 [53.5]
3	Packard B	2.10 [53.5]
4	M12	1.71 [43.5]
5	FORMA	1.93 [49.0]
6	FORM C	1.97 [50.0]
7	AMP	2.52 [64.0]

CODE	PRESSURE PORT TYPE		
	PORT	DIMA	DIM B
1	G1/4 JIS B2351	0.472[12.00]	0.3 [8.0]
2	M20x1.5 mm ISO 6149-2	0.661[16.8]	0.3[8.0]
3	1/4-18 NPT	0.600[15.24]	0.3 [8.0]
4	7/16-20UNFFEMALE SAE J513 STRAIGHT THREAD WITH INTEGRAL VALVE DEPRESSOR	0.687[17.5]	0.3 [8.0]
5	M14x1.5 mm ISO 6149-2	0.433[11.0]	0.3 [8.0]
6	1/8-27 NPT	0.390 [9.91]	0.3[8.0]
7	M12x1.5 mm ISO 6149-2	0.433[11.0]	0.3[8.0]
8	M10x1.0 mm ISO 6149-2	0.374 [9.5]	0.3[8.0]
9	G1/4 DIN 3852 FORME GASKETDIN3869-14 NBR	0.512[13.00]	0.3[8.0]

The following wiring definition is commonly used in Mainland China and will need to be determined individually with the European, the UK and the US cusotmers.

CURRENT OUTPUT WIRING					
CONNECTION	+SUPPLY	-SUPPLY	NC. PINS		P REF VENT
Packard, A	A	B	C		Hole Through Connector
Packard, B	B	A	C		
FORM A	1	2	3,4		
M12	1	2	3,4		
CABLE	RED	BLK			Pipe In Cable
VOLTAGE OUTPUT WIRING					
CONNECTION	+SUPPLY	+OUTPOT	COMMON	NC. PINS	P REF VENT
Packard, A	A	C	B		Hole Through Connector
Packard, B	B	C	A		
FORM A	1	3	2	4	
M12	1	3	2	4	
CABLE	RED	WHT	BLK		Pipe In Cable

Compensated Temperature:

This is the temperature range within which the product will produce an output proportional to pressure, while remaining within the specified performance limits.

Operating Temperature:

This is the temperature range within which the product will produce an output proportional to pressure, but it may not remain within the specified performance limits.

Storage Temperature:

This is the temperature range within which the product can be safely stored without pressure applied or power input, while still maintaining its rated performance. Exposure to temperatures beyond this range may cause permanent damage to the product.

All configurations are designed with protection against reverse supply voltage and output short circuits.

CE Compliance (just for reference)

EN 55022 Emissions Class A & B

IEC 61000-4-2 Electrostatic Discharge Immunity (8kV contact/15kV air)

IEC 61000-4-3 Radiated, Radio-Frequency Electromagnetic Field Immunity (10V/m, 80M-1GHz)

IEC 61000-4-4 Electrical Fast Transient Immunity (1kV)

IEC 61000-4-5 Surge Immunity (V+ to V-: $\pm 2\text{kV}/42\Omega$; L to Case: $\pm 1\text{kV}/12\Omega$; V- to V0: $\pm 1\text{kV}/42\Omega$)

IEC 61000-4-6 Immunity to Conducted Disturbances Induced by Radio Frequency

Fields (150K~80MHz, 10V level for voltage output models, 3V level for current output model)

IEC 61000-4-9 Pulse Magnetic Field Immunity (100A/m peak)

For all CE compliance tests, max allowed output deviation $\pm 1.5\%$ F.S. (Just Factory Testing)

Weather-Proof Rating

Connection	P Code
Packard A / B	IP66
Cable	IP67
M12	IP67
Form A	IP65
Form C	IP66
AMP	IP66

Mechanical data

Materials in contact with media

Pressure connection	Stainless steel 17-4 PH
Pressure transducer diaphragm	Stainless steel SUS 316L
Pressure transducer seal (internal)	None
Pressure connection seal (external)	None, metallicly sealed







Electrical connections

Round plug	2-wire		3-wire		Valve plug	2-wire		3-wire	
M12 × 1	4...20 mA		0...10 V		Form A	4...20 mA		0...10 V	
									
	2	n.c.	2	n.c.		2	OUT/GND	2	+OUT
	3	OUT/GND	3	+OUT		3	+Vs	3	+Vs
	4	n.c.	4	GND		↓	Case	↓	Case

Series VTP540 – Thread Dimensions and options

Available pressure connections

For reference only

G1/4 "Mano" with centring pin	1/4-18NPT male	7/16-20UNF 2B female
		
DIN EN837	ASME/ANSI B 120.1	Autoclave SF250CX20
G1/4 "Mano" with centring pin	1/4-18NPT male	7/16-20UNF 2B female
		
DIN EN837	ASME/ANSI B 120.1	Autoclave SF250CX20

Series VTP540 – Ordering Information

Example	VTP540341015500PG	VTTP540	3	4	1	0	1	5	500P	G
Model Code VTTP540 Pressure Transducer										
Output	1	0.5-4.5V RATIOMETRIC								
	2	1-5V								
	3	4-20mA								
	4	0-5V								
	5	0-10V								
	6	1-6V								
	7	0.5-4.5V								
	x	Customization								
Connection	1	Cable								
	2	Packard A								
	3	Packard B								
	4	M12								
	5	FORM A								
	6	FORM C								
	7	AMP								
	8	Customization								
Port Material	1	304Screw+ 17-4 Diaphragm								
	2	17-4 Integral Screw								
	X	Customization								
Snubber	0	No Snubber								
	1	With Snubber								
Label	0	No Label (OEM)								
	1	AdhesiveLabel								
	2	Laser Marking								
Pressure Port	1	G1/4 JIS B2351								
	2	M20 x 1.5								
	3	1/4-18 NPT								
	4	7/16-20UNF FEMALE SAE								
	5	M14 x 1.5								
	6	1/8-27 NPT								
	7	M12 x 1.5								
	8	M10 x 1.0								
	9	G1/4 DIN 3852								
	A	G3/8 JIS B2351								
	X	Customer Specia								
Pressure Range	B	Bar								
	M	Mpa								
	P	PSI								
	K	Kpa								
Pressure Type	G	Gauge								
	S	Sealed (>500PSI)								
	C	Compound								

